



RA4Z ANNUNCIATOR

4 Zone Remote Annunciator


Harrington Signal Inc.
 2519 4th Avenue, Moline, Illinois 61265
 P.O. Box 590, Moline, Illinois 61266-0590
 Direct: (800)577-5758 Phone: (309) 762-0731 Fax: (309) 762-8215

Internet: www.harringtonsignal.com



Features

- **U.L. Listed**
- **Dimensions:** 4 1/2" W x 4 1/2" H x 7/8" D (approximate)
- **Weight:** 5.5 OZ.
- **Enclosure:** Stainless Steel Plate, Mounts on standards double gang switch box.
- **Power Requirements:** 24V DC @ 50mA
 Obtained from the HS-2200/2400 control panels. Each LED required a positive 24 volt input @ 7mA ea.

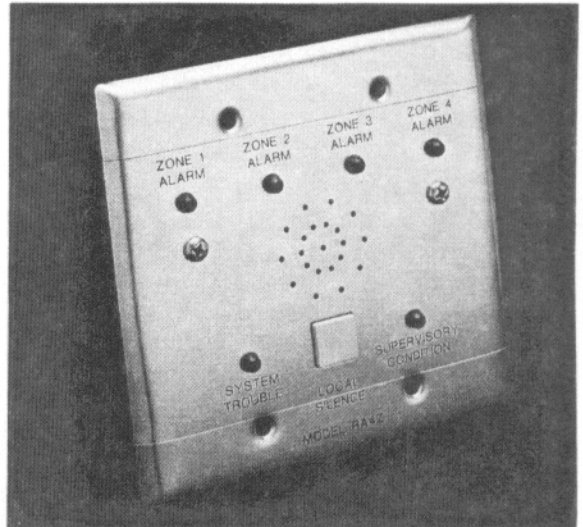


Part No. 222-0039

The model RA4Z is a remote annunciator that is designed to operate with the HS-2200 or HS-2400 Fire Alarm Control Panels. This unit will mount on a standard 2-gang switch box. There are four red LED's for an alarm indication, one yellow LED for system trouble indication and one yellow LED to indicate a supervisory condition. A built-in buzzer sounds when any of the LED's come on. A momentary push button is provided to silence the buzzer.

ELECTRICAL CONNECTIONS

RA4Z Terminal	Function	HS-2200/2400 Terminal
1	Common Neg. Power	2
2	Alarm zone 1	4
3	Alarm zone 2	5
4	Alarm zone 3	*6
5	Alarm zone 4	*7
6	System trouble	8
7	Supervisory condition	9
8	+24 volt power	1

* = Not used with HS-2200 FACP.
 See instruction manual for interconnecting to the HS-2200 & HS-2400 panels.

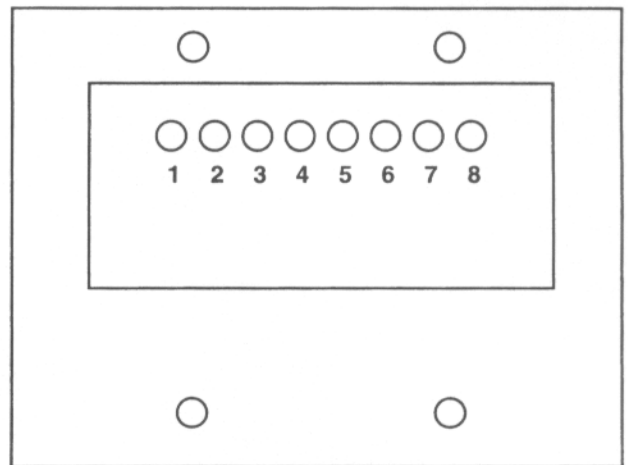

REAR VIEW